


1. Product description

The kind nails used in nail guns are called collated nails. Wire collated nails are nails that are arranged in a coil and connected with the help of wire by welding.

2. Normative references


- ASTM F1667 Driven Fasteners: Nails, Spikes, and Staples
- ASTM F1575 Determining Bending Yield Moment of Nails


3. Products

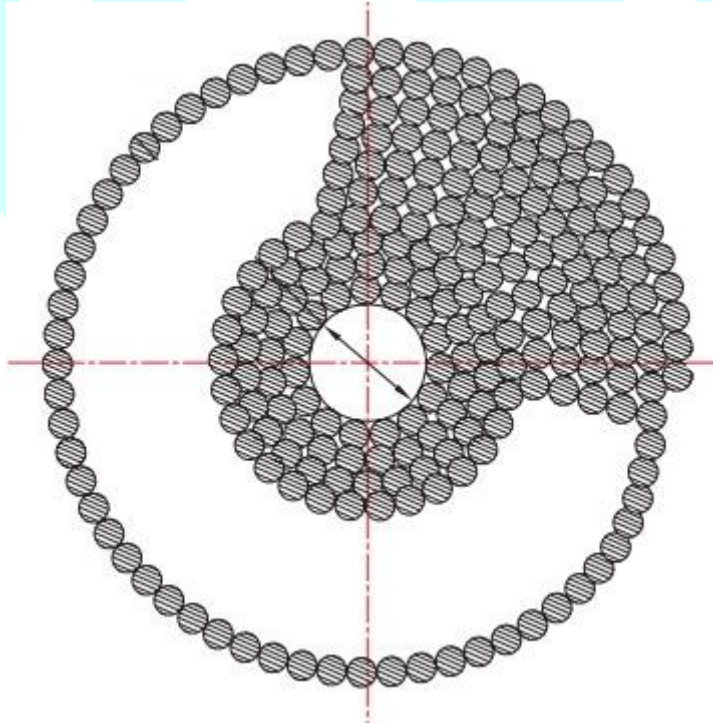

Type Of Collation	Nominal Diameter	Length	Head Style	Shank Type	Finish/Coating
Wire Coil 15 Degree	0,092" (2,33 mm)	1-1/2" (38 mm) to 2-1/2" (64 mm)	Full Round	Smooth & Ring & Screw	Bright & E.G
	0,099" (2,50 mm)	1-1/2" (38 mm) to 2-3/8" (60 mm)	Full Round	Smooth & Ring & Screw	Bright & E.G
	0,113" (2,87 mm)	2" (50 mm) to 2-1/2" (64 mm)	Full Round	Smooth & Ring & Screw	Bright & E.G
	0,12" (3,05 mm)	2" (50 mm) to 4" (100 mm)	Full Round	Smooth & Ring & Screw	Bright & E.G
	0,131" (3,33 mm)	2" (50 mm) to 4" (100 mm)	Full Round	Smooth & Ring & Screw	Bright & E.G

4. Point Types

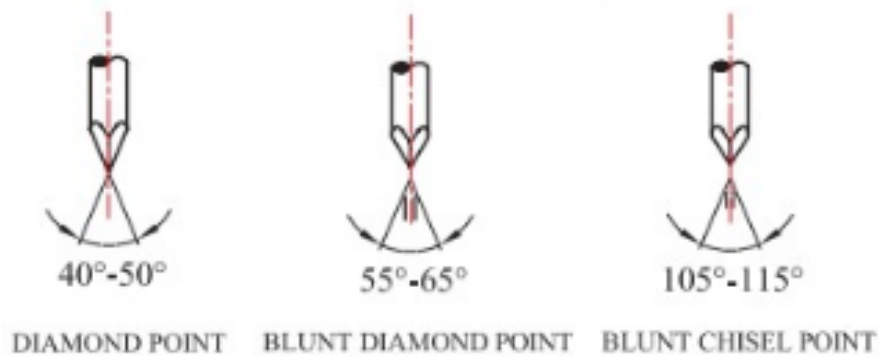

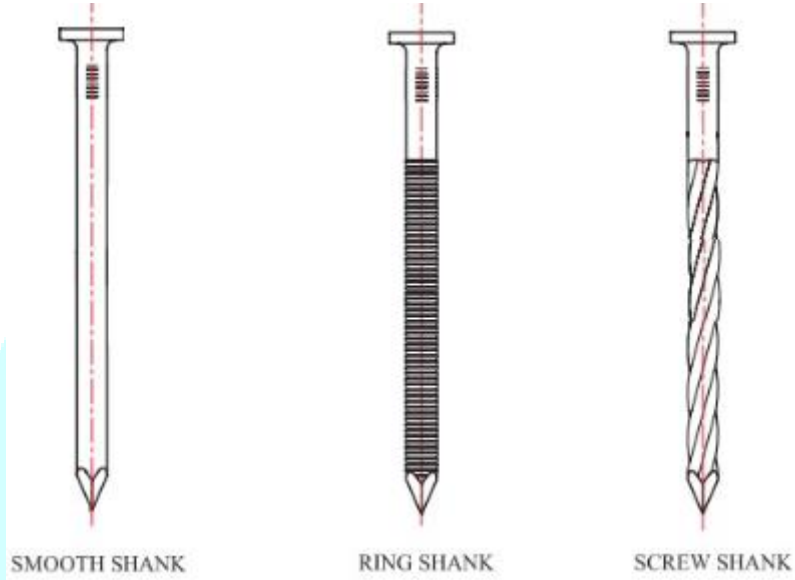5. Shank Types**6. Inspection Document**

Quality definitions are defined in the document named KEK.02 QUALITY SYSTEM DOCUMENTATION FOR NAIL PRODUCTION FACILITY.

FITS MOST 16° WIRE COIL NAILERS

BOSTITCH	HITACHI	MAX	SENCO
NE75C/N75C-1/N70CB	NV 65AC	CN80F	SCN56/SCN60 XP/
N80C/C80CB/	NV83A	CN100	SCN65 XP
N80CB1	NV83A2	CN565S	SCN300
N100C	NV83A3	CN565D	
N64P	NV75AN	CN890/890S	PORTER CABLE COIL
N86C/89C-1	NV83A5		250
	NV90AG(S)		350
DEWALT	MAKITA	GRIP-RITE	SPOTNAILS
DE51855/DWF83C	AN901/AN 611/AN 621	GRTC 90/GRTC	YCN 83
		5250	
FASCO			
F58/F6 CN15W			